


Vacuum Switch Replacement on Blower Unit for Power Direct Vent Water Heaters

Giant will replace both vacuum switches on blower units (No. 80000006) used on power direct vent water heaters. This change is performed in order to accommodate the new IPEX concentric vent termination kit (No. 196006) which is now available as an option on those units. Here is the detailed description of the changes:

1. The intake vacuum switch that was set at -1.00" wc (No. 61074197) will be replaced with one set at -1.30" wc (No. 61074225). This switch is located outside of the electrical box on the blower unit.
2. The exhaust vacuum switch that was set at -1.40" wc (No. 61074198) will be replaced with one set at -1.10" wc (No. 61074126). This switch is located inside of the electrical box on the blower unit.



Intake vacuum switch

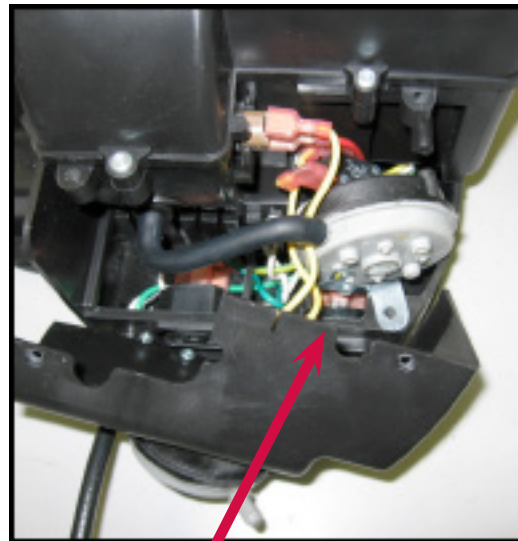

Exhaust vacuum switch

Models involved:

UG50-41TFPDV-N2U
UG50-41TFPDV-P2U
UG60-41MFPDV-N1U
UG60-41MFPDV-P1U