



Enhancing everyday living



# ENGINEERING SUBMITTAL DATA SHEET


Side entry point of use electric compact water heaters

## 112SE0 MODELS

10 imperial gallons / 45 litres  
insulated with 1" fiberglass

These models meet or exceed the safety and construction requirements of CSA 22.2 Standard

Models	Storage Capacity			Input	Voltage	Diameter (A) In. (cm)	Height (B) In. (cm)	C In. (cm)	D	E	F In. (cm)	G In. (cm)	Plumbing connections	Est. ship. wt. lb (kg)
	US gal.	Litres	Imp. gal.											
112SE0-1R5M	12	45	10	1,500 W	120 V	16 (41)	22¼ (57)	2½ (6)	45°	45°	16½ (42)	15½ (40)	¾" NPT	52 (24)
112SE0-3R5M	12	45	10	3,000 W/2,250 W	240 V/208 V	16 (41)	22¼ (57)	2½ (6)	45°	45°	16½ (42)	15½ (40)	¾" NPT	52 (24)

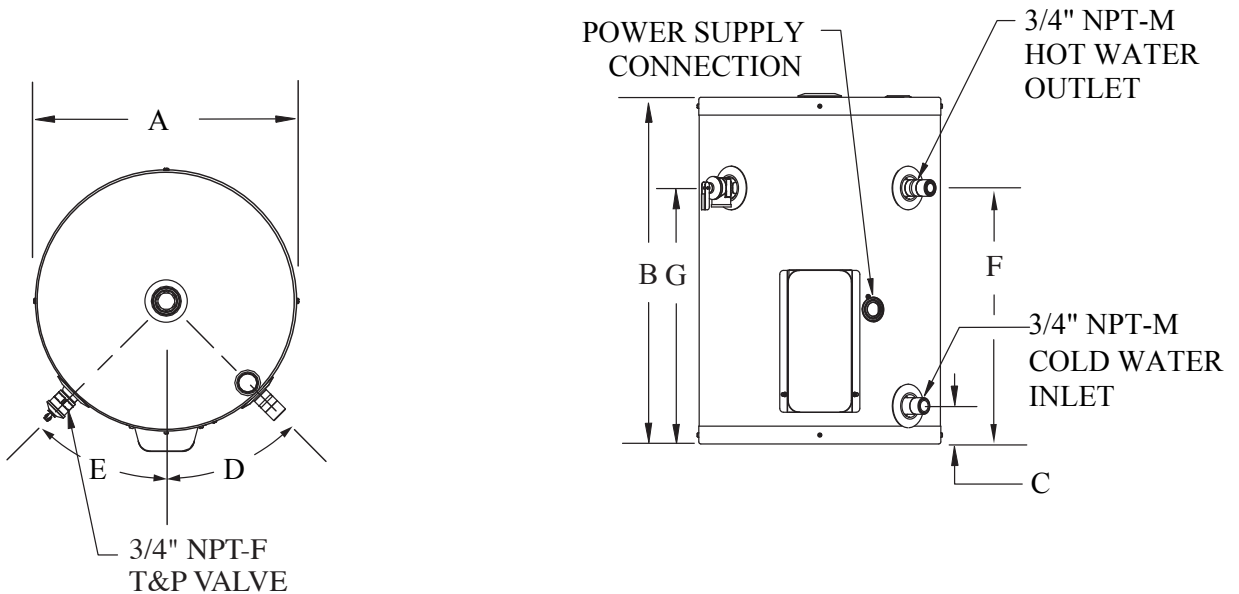

JOB TITLE

ADDRESS

CONTRACTOR

ADDRESS

ENGINEER

SUBMITTED DATE

REQUIRED PRODUCT

MODEL NO. SIZE QUANTITY

MODEL NO. SIZE QUANTITY

MODEL NO. SIZE QUANTITY

MODEL NO. SIZE QUANTITY

REQUIRED DATE

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

[giantinc.com](http://giantinc.com)



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969