

Enhancing everyday living





ENGINEERING SUBMITTAL DATA SHEET


C191.1 top entry residential electric water heaters

172ETE MODELS

61 imperial gallons / 279 litres insulated with 1 3/4" eco-friendly GREENFOAM

These models meet the safety and construction requirements of CSA 22.2 Standard and meet or exceed RNCan energy efficiency requirements

Models	Sto US gal.	orage Cap	acity Imp. gal.	Input	Voltage	Standby loss	Diameter (A)	Height (B)	C In. (cm)	D	E In. (cm)	Plumbing connections	Est. ship. wt.
172ETE-1F7M	74	279	61	1,500 W	120 V	89 W	23 ½ (60)	59 % (152)	2 ½ (6)	45°	8 (20)	3/4" NPT	185 (84)
172ETE-2F7M	74	279	61	4,500 W	208 V	89 W	23 ½ (60)	59 % (152)	2 ½ (6)	45°	8 (20)	3/4" NPT	185 (84)
172ETE-3F7M	74	279	61	4,500 W	240 V	89 W	23 ½ (60)	59 % (152)	2 ½ (6)	45°	8 (20)	3/4" NPT	185 (84)

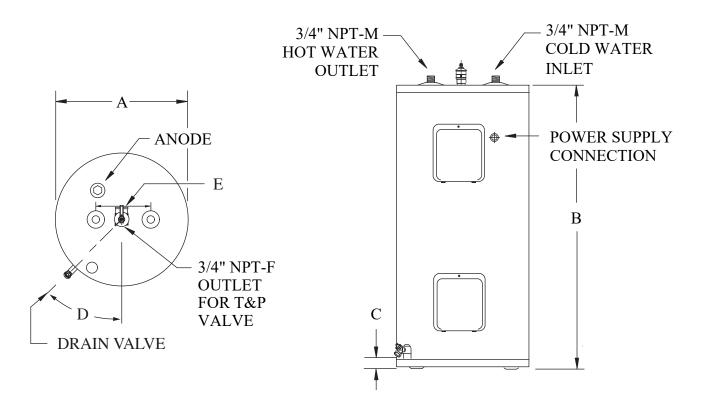

JOB TITLE	SUBMITTED DATE	SUBMITTED DATE					
ADDRESS	REQUIRED PRODUCT	REQUIRED PRODUCT					
	MODEL NO.	SIZE	QUANTITY				
CONTRACTOR	MODEL NO.	SIZE	QUANTITY				
ADDRESS	MODEL NO.	SIZE	QUANTITY				
	MODEL NO.	SIZE	QUANTITY				
ENGINEER	REQUIRED DATE	REQUIRED DATE					

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com

