



Enhancing everyday living



ENGINEERING SUBMITTAL DATA SHEET

FFIR compliant residential atmospheric vent
natural gas-fired water heater

UG50 MODELS


42 imperial gallons / 189 litres
insulated with 1 3/4" eco-friendly **GREENFOAM**

This model meets the safety and construction requirements of CSA 4.1 Standard
and meets or exceeds NRCan energy efficiency requirements

Model	Storage Capacity			Type of gas	Input BTU	Recovery 90 °F / 50 °C			E. F. Number	Altitude	Est. ship. weight lb (kg)
	(US) gal	Litres	Imp. Gal			(US) gal	Litres	Imp. Gal			
UG50-40LF-N2U-RE	50	189	42	N	40,000	42.6	161.1	35.4	0.61	N	167 (76)

DIMENSIONS inches (cm)

Model	A	B	C	D	E	F	G	H	I	J	K
UG50	7 1/8 (18)	40 1/16 (102)	48 3/8 (123)	12 1/8 (31)	49 5/8 (126)	51 1/2 (131)	8 (20)	23 1/2 (60)	4 (10)	15.6°	90.0°

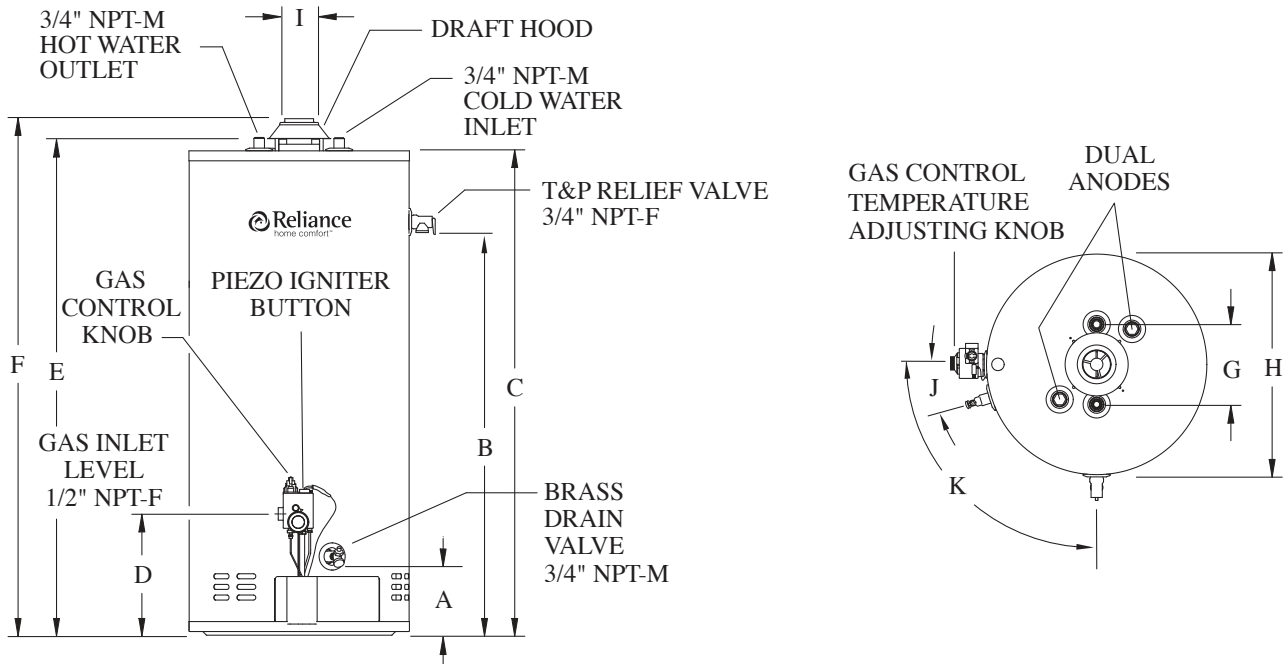

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: 514-645-8893 • Fax: 514-640-0969