

Enhancing everyday living

## ®





## **ENGINEERING SUBMITTAL DATA SHEET**

FVIR compliant residential power vent natural gas-fired water heater

## **UG60 MODELS**


50 imperial gallons / 227 litres insulated with 1 <sup>3</sup>/<sub>4</sub>" eco-friendly GREENFOAM\*


This model meets the safety and construction requirements of CSA 4.1 Standard and meets or exceeds NRCan energy efficiency requirements

Model	S U.S. gal	torage Capaci	t <b>y</b> Imp. gal	Type of gas	Input BTU	Rec U.S. gal	covery 90 °F / 5	0°C	E.F. Number	Altitude	Est. ship. weight
UG60-40MFPV2-N2U-RE	60	227	50	N	40,000	42.0	159.0	35.0	0.67	N&H	205 (93)
DIMENSIONS Inches (cm)											

Model	Α	В	С	D	E	F	G	Н	I	J	K
UG60	7 1/8 (18)	48 (122)	56½ (144)	12 (31)	57 <sup>7</sup> / <sub>8</sub> (147)	66 % (169)	2 - 3* (5 - 7.6)	23 ½ (60)	8 (20)	15.6°	90.0°

<sup>\*</sup>Refer to installation manual

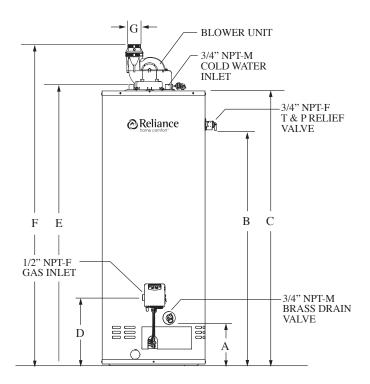



JOB TITLE	SUBMITTED DATE							
ADDRESS	REQUIRED PRODUCT	REQUIRED PRODUCT						
	MODEL NO.	SIZE	QUANTITY					
CONTRACTOR	MODEL NO.	SIZE	QUANTITY					
ADDRESS	MODEL NO.	SIZE	QUANTITY					
	MODEL NO.	SIZE	QUANTITY					
ENGINEER	REQUIRED DATE							

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com

