

Enhancing everyday living







ENGINEERING SUBMITTAL DATA SHEET

Commercial electric water heaters, Flexible

112 MODELS (Light & Medium Duty)

99 imperial gallons / 450 litres


Insulated with 2" Eco-Friendly GREENFOAM

208, 240, 277 & 480 Volts / Single phase

These models meet the safety and construction requirements of CSA Standard C22.2 No. 110 and meet or exceed the standby loss requirements of NRCan and ASHRAE 90.1 Standard.

Models*	Input	Input Amperage					Number of elements
	(kW)	208 Volts	240 Volts	277 Volts	480 Volts		or cicinents
Light Duty (2 elem	ents) & Me	edium Duty (4	elements)				
1122Y-1-3S	3	14.4	12.5	10.8	6.3		
1122Y-1-4.5S	4.5	21.6	18.8	16.2	9.4		2
1122Y-1-5S	5	24.0	20.8	18.1	10.4		2
1122Y-1-6S	6	_	25.0	21.7	12.5	1	
1124Y-1-6S	6	28.8	25.0	21.7	12.5		
1124Y-1-9S	9	43.3	37.5	32.5	18.8		4
1124Y-1-10S	10	48.1	41.7	36.1	20.8		4
1124Y-1-12S	12	_	50.0	43.3	25.0		

^{*} Replace the "Y" by the letter referring to its voltage (refer to the following "Voltage index" as well as the "Model Number Structure" for further details).

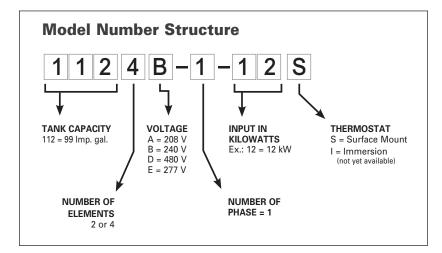

Voltage index						
А	208 Volts					
В	240 Volts					
D	480 Volts					
E	277 Volts					

Notes:	 	








Commercial electric water heaters, Flexible

112 MODELS

(Light & Medium Duty)

99 imperial gallons / 450 litres

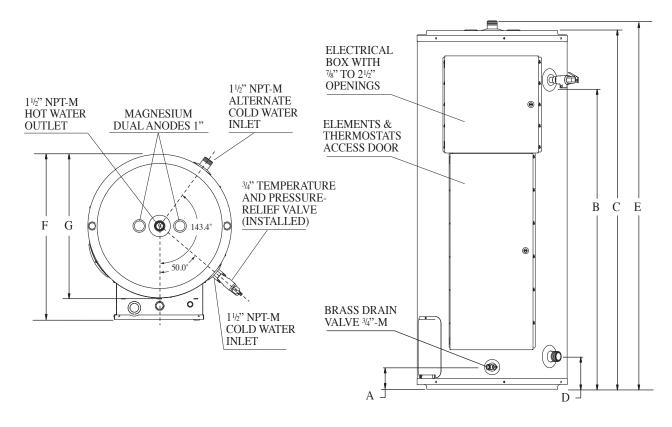

Models	Stor	age Capac	ity	Α	В	С	D	Е	F	G	Est. Shi	p. Weight
Models	Imp. gal.	Litres	U.S. gal.	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	lb.	kg
All 112	99	450	119	4 1/8 (10.5)	56 5/8 (143.8)	67 3/8 (171.1)	6 1/8 (15.6)	69 1/4 (175.9)	32 5/8 (82.9)	28 1/4 (71.8)	435	197.3

Notes:			
JOB TITLE	SUBMITTED DATE		
ADDRESS	REQUIRED PRODUCT		
	MODEL NO.	SIZE	QUANTITY
CONTRACTOR	MODEL NO.	SIZE	QUANTITY
ADDRESS	MODEL NO.	SIZE	QUANTITY
	MODEL NO.	SIZE	QUANTITY
ENGINEER	REQUIRED DATE		

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com





Enhancing everyday living







ENGINEERING SUBMITTAL DATA SHEET

Commercial electric water heaters, Flexible

112 MODELS (Heavy Duty)

99 imperial gallons / 450 litres

Insulated with 2" Eco-Friendly GREENFOAM

208, 240, 277 & 480 Volts

These models meet the safety and construction requirements of CSA Standard C22.2 No. 110 and meet or exceed the standby loss requirements of NRCan and ASHRAE 90.1 Standard.

Models*	Input		Amperage				Number of elements
	(kW)	208 Volts	240 Volts	277 Volts	480 Volts		or elements
Heavy Duty with 3	, 6, or 9 el	ements					
1123Y-1-6S		28.8	25.0	21.7	12.5	1	
1123Y-3-6S	6	16.7	14.5	_	7.2	3	
1123Y-1-9S	0	43.3	37.5	32.5	18.8	1	
1123Y-3-9S	9	25.0	21.7	_	10.8	3	
1123Y-1-12S	40	57.7	50.0	43.3	25.0	1	0
1123Y-3-12S	12	33.3	28.9	_	14.4	3	3
1123Y-1-13.5S	10.5	64.9	56.3	48.7	28.1	1	
1123Y-3-13.5S	13.5	37.5	32.5	_	16.2	3	
1123Y-1-15S		72.1	62.5	54.2	31.3	1	
1123Y-3-15S	15	41.6	36.1	_	18.0	3	
112XY-1-18S	18	86.5 [†]	75.0	65.0	37.5	1	0 0
112XY-3-18S		50.0 [†]	43.3	_	21.7	3	3 or 6
1126Y-1-24S	0.4	115.4	100.0	86.6	50.0	1	
1126Y-3-24S	24	66.6	57.7	_	28.9	3	
1126Y-1-27S	0.7	129.8	112.5	97.5	56.3	1	0
1126Y-3-27S	27	74.9	65.0	_	32.5	3	6
1126Y-1-30S	20	144.2	125.0	108.3	62.5	1	
1126Y-3-30S	30	83.3	72.2	_	36.1	3	
112XY-1-36S	200	173.1 ^{††}	150.0	130.0	75.0	1	0 0
112XY-3-36S	36	99.9††	86.6	_	43.3	3	6 or 9
1129Y-1-40.5S	40.5	194.7	168.8	146.2	84.4	1	
1129Y-3-40.5S	40.5	112.4	97.4	_	48.7	3	
1129Y-1-45S	45	216.3	187.5	162.5	93.8	1	0
1129Y-3-45S	45	124.9	108.3	_	54.1	3	9
1129Y-1-54S	54	_	255.0	194.9	112.5	1	
1129Y-3-54S	54	_	129.9	_	65.0	3	

Replace the "X" in the model number by the element quantity shown in the "Number of elements" column as well as the "Y" by the letter referring to its voltage (refer to the following "Voltage index" as well as the "Model Number Structure" for further details).

^{††} For 208 V Models with a 36kW input, only the 9-element configuration is possible.

112	6 B - 3	-24 S	
TANK CAPACITY 112 = 99 Imp. gal.	VOLTAGE A = 208 V B = 240 V D = 480 V E = 277 V	INPUT IN KILOWATTS Ex.: 24 = 24 kW	THERMOSTAT S = Surface Moun I = Immersion (not yet available)
NUMBER OF ELEMENTS 3, 6, or 9		NUMBER OF PHASE 1 or 3	

Voltage index						
Α	208 Volts					
В	240 Volts					
D	480 Volts					
Е	277 Volts					

See reverse for this model drawing as well as order details.

giantinc.com



In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

[†] For 208 V Models with a 18 kW input, only the 6-element configuration is possible.




Commercial electric water heaters, Flexible

112 MODELS

(Heavy Duty)

99 imperial gallons / 450 litres

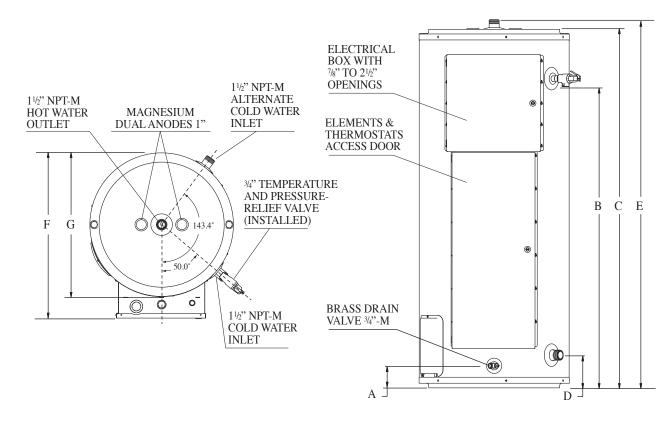

Models	Sto	rage Capad	city	Α	В	С	D	E	F	G	Est. Shi	p. Weight
Models	Imp. gal.	Litres	U.S. gal.	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	lb.	kg
All 112	99	450	119	4 1/8 (10.5)	56 5/8 (143.8)	67 3/8 (171.1)	6 1/8 (15.6)	69 1/4 (175.9)	32 5/8 (82.9)	28 1/4 (71.8)	435	197.3

Notes:			
JOB TITLE	SUBMITTED DATE		
ADDRESS	REQUIRED PRODUCT		
	MODEL NO.	SIZE	QUANTITY
CONTRACTOR	MODEL NO.	SIZE	QUANTITY
ADDRESS	MODEL NO.	SIZE	QUANTITY
	MODEL NO.	SIZE	QUANTITY
ENGINEER	REQUIRED DATE		

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com





Enhancing everyday living







ENGINEERING SUBMITTAL DATA SHEET

Commercial electric water heaters, Flexible

112 MODELS (Heavy Duty)


99 Imp. gallons / 450 litres

Insulated with 2" Eco-Friendly GREENFOAM

600 Volts / Three phases with 3, 6, or 9 elements

These models meet the safety and construction requirements of CSA Standard C22.2 No. 110 and meet or exceed the standby loss requirements of NRCan and ASHRAE 90.1 Standard.

Models	Input (kW)	Number of elements	Amperage
1123C-3-6S	6		5.8
1123C-3-9S	9]	8.7
1123C-3-12S	12	3	11.5
1123C-3-13.5S	13.5		13.0
1123C-3-15S	15		14.4
1123C-3-18S	18		17.3
1126C-3-18S	18		17.3
1126C-3-24S	24		23.1
1126C-3-27S	27	6	26.0
1126C-3-30S	30]	28.9
1126C-3-36S	36		34.6
1129C-3-36S	36		34.6
1129C-3-40.5S	40.5		39.0
1129C-3-45S	45	9	43.3
1129C-3-54S	54		52.0
1129C-3-63S	63		60.6

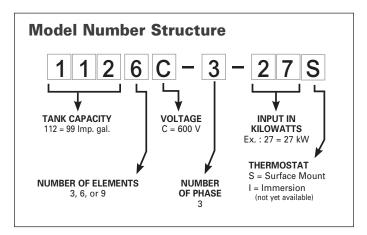

Voltage Index С 600 Volts

Notes:		

See reverse for this model drawing as well as order details.








Commercial electric water heaters, Flexible

112 MODELS (Heavy Duty)

99 Imp. gallons / 450 litres

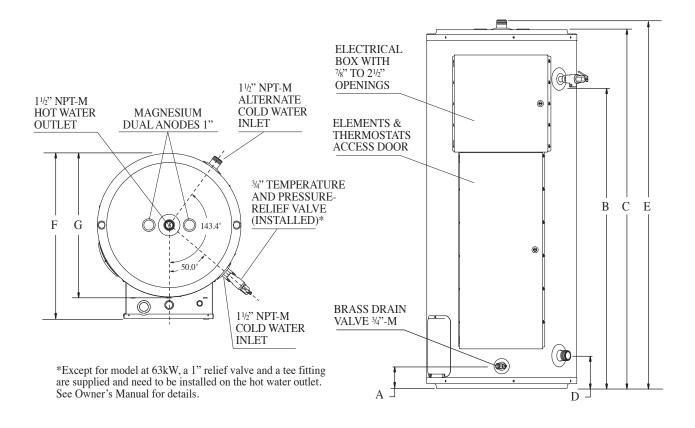

Models	Storage Capacity			Α	В	С	D	E	F	G	Est. Shi	p. Weight
	Imp. gal.	Litres	U.S. gal.	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	Inches (cm)	lb.	kg
All 112	99	450	119	4 1/8 (10.5)	56 5/8 (143.8)	67 3/8 (171.1)	6 1/8 (15.6)	69 1/4 (175.9)	32 5/8 (82.9)	28 1/4 (71.8)	435	197.3

Notes:						
JOB TITLE	SUBMITTED DATE					
ADDRESS	REQUIRED PRODUCT	REQUIRED PRODUCT				
	MODEL NO.	SIZE	QUANTITY			
CONTRACTOR	MODEL NO.	SIZE	QUANTITY			
ADDRESS	MODEL NO.	SIZE	QUANTITY			
	MODEL NO.	SIZE	QUANTITY			
ENGINEER	REQUIRED DATE					

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com

