



Enhancing everyday living



# ENGINEERING SUBMITTAL DATA SHEET



Bottom entry point of use electric water heaters

## 130E MODELS

22 imperial gallons / 100 litres  
insulated with 2" eco-friendly **GREENFOAM**

These models meet or exceed the safety and construction requirements of CSA 22.2 Standard

Models	Storage Capacity			Input	Voltage	Standby loss	Diameter (A) In. (cm)	Height (B) In. (cm)	C In. (cm)	D	E In. (cm)	F In. (cm)	Plumbing connections	Est. ship. wt. lb (kg)
	US gal.	Litres	Imp. gal.											
130E-1R7N	26	100	22	1,500 W	120 V	60 W	18 1/4 (46)	42 1/2 (108)	2 1/4 (6)	58°	-	43 3/4 (111)	3/4" NPT	90 (41)
130E-3R7N	26	100	22	3,000 W/2,250 W	240 V/208 V	60 W	18 1/4 (46)	42 1/2 (108)	2 1/4 (6)	58°	-	43 3/4 (111)	3/4" NPT	90 (41)

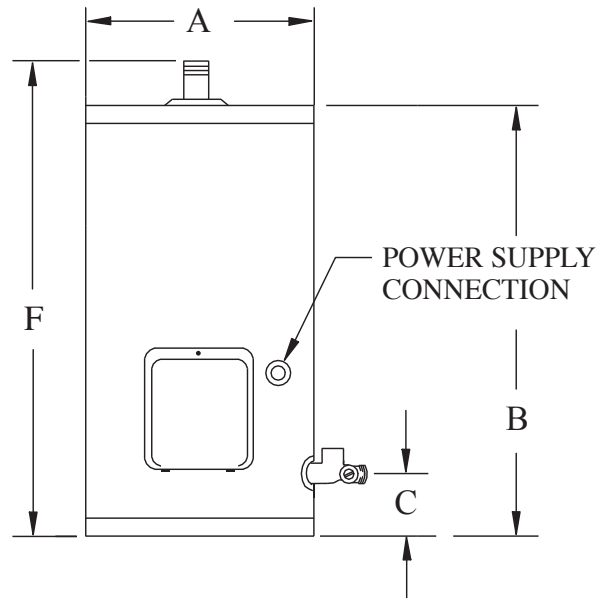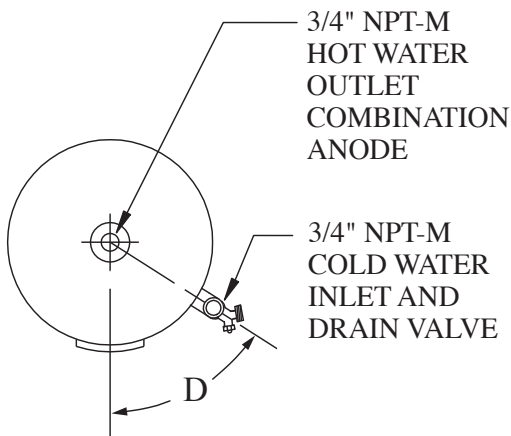

JOB TITLE

ADDRESS

CONTRACTOR

ADDRESS

ENGINEER

SUBMITTED DATE

REQUIRED PRODUCT

MODEL NO. SIZE QUANTITY

MODEL NO. SIZE QUANTITY

MODEL NO. SIZE QUANTITY

MODEL NO. SIZE QUANTITY

REQUIRED DATE

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

[giantinc.com](http://giantinc.com)



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969