Enhancing everyday living

C US
LOW LEAD CONTENT

ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential natural gas-fired water heaters with Powered Damper

UG40 MODELS

33 imperial gallons / 151 litres
insulated with 1 ¼" eco-friendly GREENFOAM

These models meet the safety and construction requirements of CSA 4.1 Standard and meet or exceed NRCan energy efficiency requirements

Models	Storage Capacity			Type of gas	Input BTU	Recovery 90 °F / 50 °C			E.F. Number	Altitude	Est. ship. weight lb (kg)
	U.S. gal	Litres	Imp. gal			U.S. gal	Litres	Imp. gal			
UG40-34LFD-N1U	40	151	33	N	34,000	35.7	135.2	29.7	0.67	N & H	137 (62)
UG40-38LFD-N1U	40	151	33	N	38,000	39.9	151.1	33.2	0.67	N	137 (62)

DIMENSIONS Inches (cm)

Models	A	B	C	D	E	F	G	H	I	J	K
All UG40	7¼ (18)	40⅛ (102)	48⅜ (123)	11⅛ (28)	50 (127)	54⅞ (139)	8 (20)	20 ½ (52)	3-4 (8-10)	17.4°	90.0°

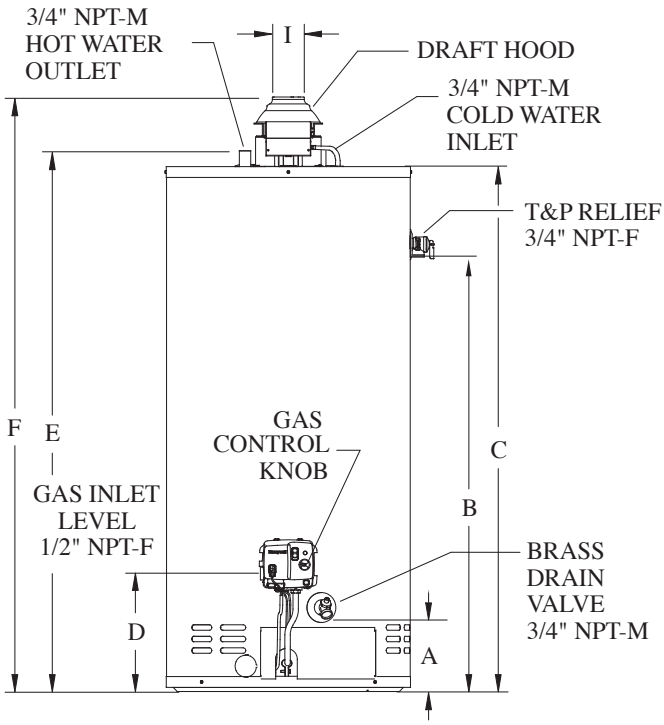

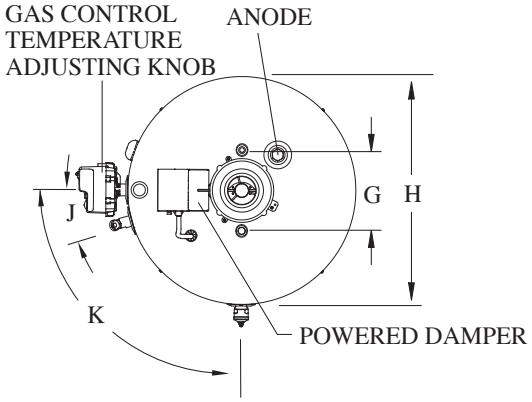

JOB TITLE

ADDRESS

CONTRACTOR

ADDRESS

ENGINEER

SUBMITTED DATE

REQUIRED PRODUCT

MODEL NO. SIZE QUANTITY

MODEL NO. SIZE QUANTITY

MODEL NO. SIZE QUANTITY

MODEL NO. SIZE QUANTITY

REQUIRED DATE

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com

40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • **Telephone: (514) 645-8893** • Fax: (514) 640-0969

FT-UG40ATM-VM-An-0423