Enhancing everyday living

C US
LOW LEAD CONTENT

ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential power direct vent natural gas-fired water heater

UG40 MODEL

33 imperial gallons / 151 Litres insulated with 2" eco-friendly GREENFOAM®

This model meets the safety and construction requirements of CSA 4.1 Standard and meets or exceeds NRCan energy efficiency requirements

Models	Storage Capacity (US) gal	Litres	Imp. gal	Type of gas	Input BTU	Recovery 90 °F / 50 °C (US) gal	Litres	Imp. gal	E. F. Number.	Altitude	Est. ship. weight lb (kg)
UG40-40TFPDV1-N2U	40	151	33	N	40,000	38.8	146.9	32.3	0.71	N & H	190 (86.2)
UG40-40TFPDV1-P2U	40	151	33	LP	40,000	39.8	150.7	33.1	0.73	N & H	190 (86.2)

DIMENSIONS inches (cm)

Models	A	B	C	D	E	F	G	H	I	J	K	L
All UG40	9 ⅜ (24)	51 ½ (131)	60 (152)	14 ¾ (37)	61 ¼ (156)	70 ½ (179)	2 (5) - 3 (7.6)*	20 (51)	8 (20)	19,5°	90,0°	29 (74)

*Choice of 2 inches (5 cm) or 3 inches (7.6 cm) evacuation.

Illustrated model (2")

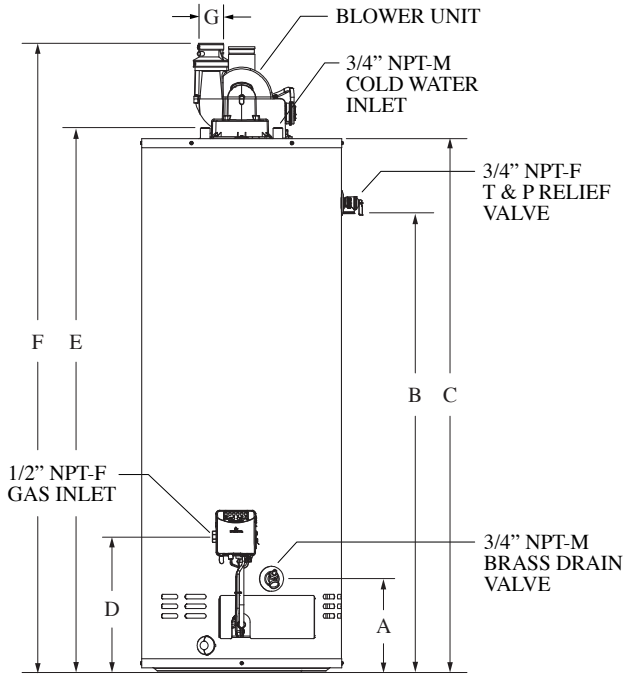

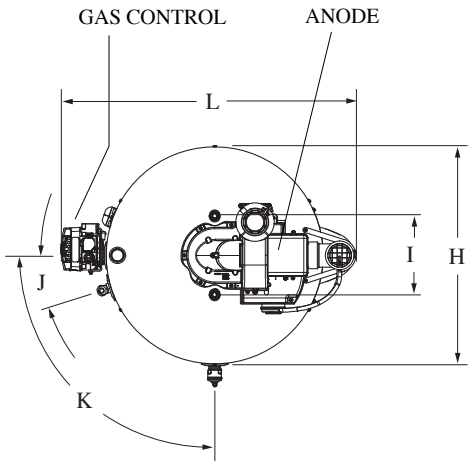

JOB TITLE _____ SUBMITTED DATE _____

ADDRESS _____ REQUIRED PRODUCT _____

_____ MODEL NO. _____ SIZE _____ QUANTITY _____

CONTRACTOR _____ MODEL NO. _____ SIZE _____ QUANTITY _____

ADDRESS _____ MODEL NO. _____ SIZE _____ QUANTITY _____

_____ MODEL NO. _____ SIZE _____ QUANTITY _____

ENGINEER _____ REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice. **giantinc.com**

40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • **Telephone: (514) 645-8893** • Fax: (514) 640-0969