



ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential power vent
propane and natural gas-fired water heaters



UG50 MODELS


42 imperial gallons / 189 litres
insulated with 2" eco-friendly **GREENFOAM™**

These models meet the safety and construction requirements of CSA 4.1 Standard
and meet or exceed NRCAN energy efficiency requirements



Models	Storage Capacity			Type of gas	Input BTU	Recovery 90 °F / 50 °C			E.F. Number	Energy Star	First-Hour Rating	Altitude	Est. ship. weight lb (kg)
	U.S. gal	Litres	Imp. gal			U.S. gal	Litres	Imp. gal					
UG50-58LFPV1-P2U	50	189	42	LP	58,000	64.1	242.6	53.4	0.70	✓	110	N & H	200 (91)
UG50-62LFPV1-N2U	50	189	42	N	62,000	68.5	259.2	57.0	0.70	✓	120	N & H	200 (91)

Models	DIMENSIONS Inches (cm)													
	A	B	C	D	E	F	G	H	I	J	K	L	M	N
All UG50	7 1/8 (18.1)	41 (104.1)	50 7/8 (129.2)	12 3/8 (31.4)	52 (132.1)	60 3/4 (154)	3-4 (7.6-10.2)	24 (61)	8 (20)	15.6°	45.2°	42 1/4 (107.3)	8 3/4 (22.2)	2 3/8 (6)

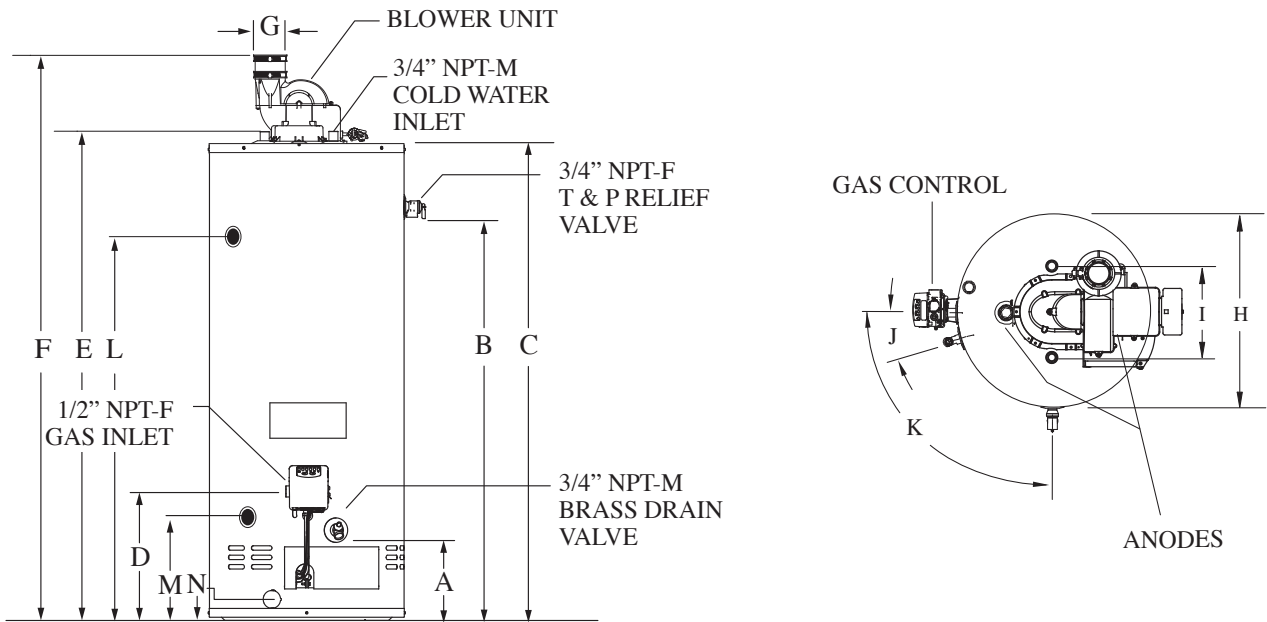

JOB TITLE _____

SUBMITTED DATE _____

ADDRESS _____

REQUIRED PRODUCT _____

CONTRACTOR _____

MODEL NO. _____ SIZE _____ QUANTITY _____

ADDRESS _____

MODEL NO. _____ SIZE _____ QUANTITY _____

ENGINEER _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969