Enhancing everyday living

C US
LOW LEAD CONTENT

ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential power direct vent natural & propane gas-fired water heaters

UG50 MODELS

40 imperial gallons / 182 Litres insulated with 2" eco-friendly GREENFOAM®

These models meet the safety and construction requirements of CSA 4.1 Standard and meet or exceed NRCan energy efficiency requirements

Models	Storage Capacity (US) gal	Storage Capacity Litres	Storage Capacity Imp. gal	Type of gas	Input BTU	Recovery 90 °F / 50 °C (US) gal	Recovery 90 °F / 50 °C Litres	Recovery 90 °F / 50 °C Imp. gal	E. F. Number.	Altitude	Est. ship. weight lb	Est. ship. weight (kg)
UG50-42TFPDV1-N2U	48	182	40	N	42,000	40.7	154.1	33.9	0.71	N & H	195	(88.5)
UG50-42TFPDV1-P2U	48	182	40	LP	42,000	41.7	157.9	34.7	0.73	N & H	195	(88.5)

DIMENSIONS inches (cm)

Models	A	B	C	D	E	F	G	H	I	J	K	L
All UG50	9 3⁄8 (24)	50 3⁄8 (128)	58 5⁄8 (149)	14 3⁄4 (37)	59 3⁄4 (152)	69 (175)	2 (5) - 3 (7.6)*	22 (56)	8 (20)	17.4°	90.0°	29 7⁄8 (76)

*Choice of 2 inches (5 cm) or 3 inches (7.6 cm) evacuation.

Illustrated model (2")

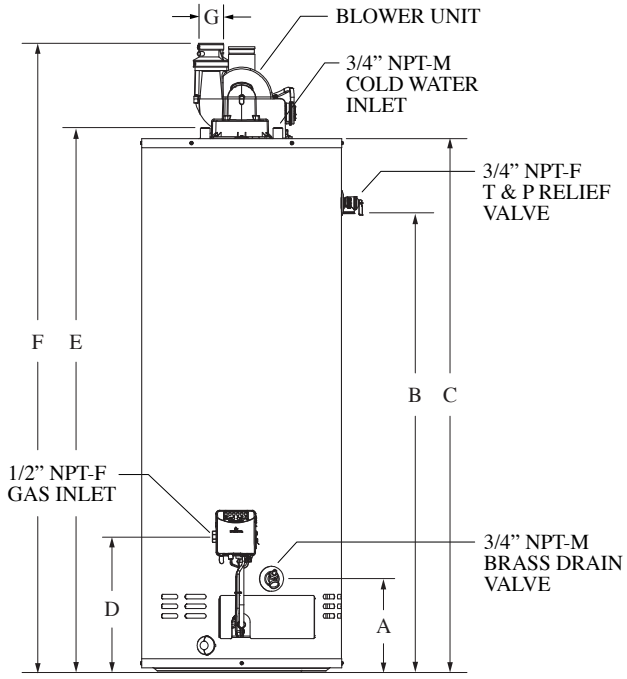

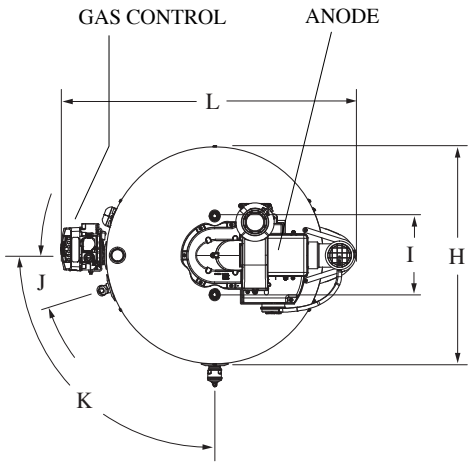

JOB TITLE _____ SUBMITTED DATE _____

ADDRESS _____ REQUIRED PRODUCT _____

_____ MODEL NO. _____ SIZE _____ QUANTITY _____

CONTRACTOR _____ MODEL NO. _____ SIZE _____ QUANTITY _____

ADDRESS _____ MODEL NO. _____ SIZE _____ QUANTITY _____

_____ MODEL NO. _____ SIZE _____ QUANTITY _____

ENGINEER _____ REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice. **giantinc.com**

40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • **Telephone: (514) 645-8893** • Fax: (514) 640-0969

FT-UG50PDV-An-0423