Enhancing everyday living

C US
LOW LEAD CONTENT

ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential power vent
natural & propane gas-fired water heaters

UG50 MODELS

42 imperial gallons / 189 litres
insulated with 2" eco-friendly GREENFOAM®

These models meet the safety and construction requirements of CSA 4.1 Standard and meet or exceed NRCan energy efficiency requirements

Models	Storage Capacity U.S. gal	Litres	Imp. gal	Type of gas	Input BTU	Recovery 90 °F / 50 °C U.S. gal	Litres	Imp. gal	E.F. Number	Altitude	Est. ship. weight lb (kg)
UG50-40LFPV2-N2U	50	189	42	N	40,000	42.0	159.0	35.0	0.67	N & H	166 (75)
UG50-38LFPV2-P2U	50	189	42	LP	38,000	40.9	155.0	34.1	0.67	N & H	166 (75)

DIMENSIONS Inches (cm)

Models	A	B	C	D	E	F	G	H	I	J	K
All UG50	7¼ (18)	40⅜₁₆ (102)	48⅜ (123)	12⅛ (31)	49⅞ (127)	58½ (149)	2-3 (5-7.6)	23½ (60)	8 (20)	15.6°	90.0°

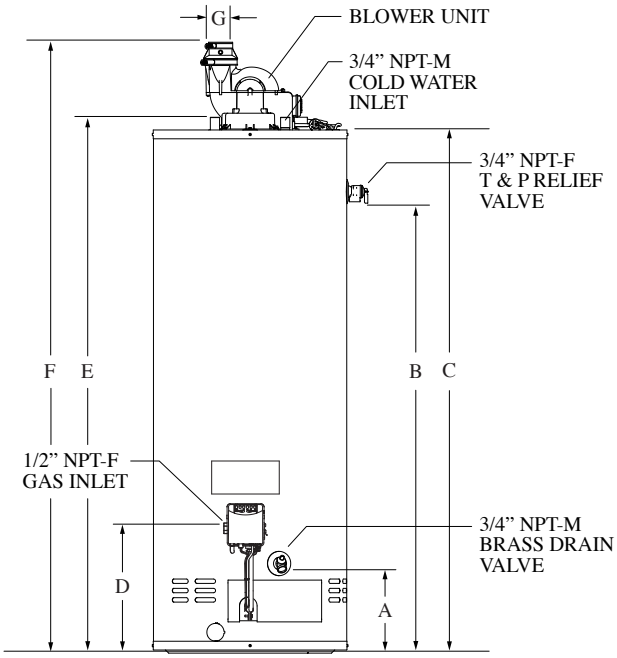

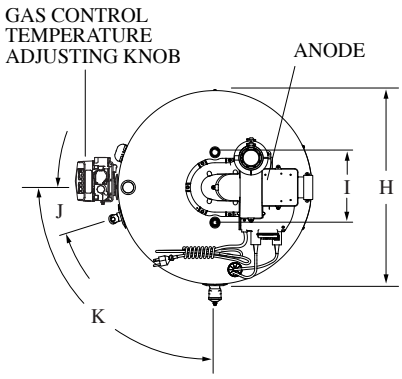

JOB TITLE _____ SUBMITTED DATE _____

ADDRESS _____ REQUIRED PRODUCT _____

MODEL NO. _____ SIZE _____ QUANTITY _____

CONTRACTOR _____ MODEL NO. _____ SIZE _____ QUANTITY _____

ADDRESS _____ MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

ENGINEER _____ REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com

40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • **Telephone: (514) 645-8893** • Fax: (514) 640-0969

FT-UG50PV2-An-0423