



RESIDENTIAL ELECTRIC WATER HEATERS
POINT OF USE

| 2 | 5 | 10 | 16 | 22 | IMP. GALLONS



BENEFITS

1 - HIGH DENSITY FIBERGLASS INSULATION

Provides superior heat retention and efficiency while being environmentally friendly.

2 - FACTORY INSTALLED 3/4" NPT DI-ELECTRIC NIPPLES

Extend the life of the water heater by providing excellent corrosion protection.

3 - HIGH QUALITY MAGNESIUM ANODE

Provides excellent protection against the corrosive effects of water and extends tank life.

4 - ELECTRIC ELEMENTS

All models are equipped with CSA approved screw-in type immersion elements made by Giant. These elements can be easily replaced with no special tools, resulting in low maintenance costs.

5 - GLASS-LINED INNER TANK

A uniquely formulated blue cobalt glass enriched with zircon is fused to specially treated steel at 1,600°F (871°C) to provide the best coating available against corrosion for many years. The tank is certified at a test pressure of 300 PSI (2,068 kPa) and a working pressure of 150 PSI (1,035 kPa).

6 - AUTOMATIC TEMPERATURE CONTROL


Adjustable thermostat will provide years of reliable trouble-free service at the desired water temperature and a safety cut-off is provided for abnormal conditions.

7 - FACTORY INSTALLED TEMPERATURE AND PRESSURE-RELIEF VALVE†



Protects the tank from the damaging effects of excessive temperature and pressure.

†Supplied but not installed for 130E model.

103ETE Model

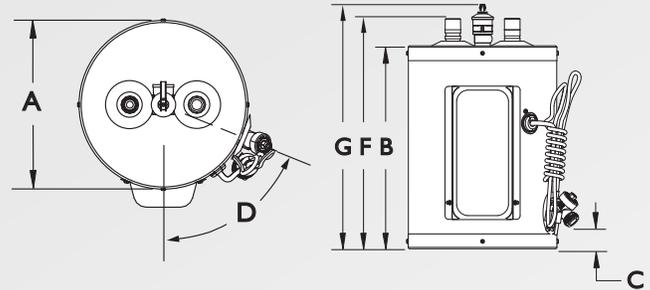

106, 112 & 119SEO Models

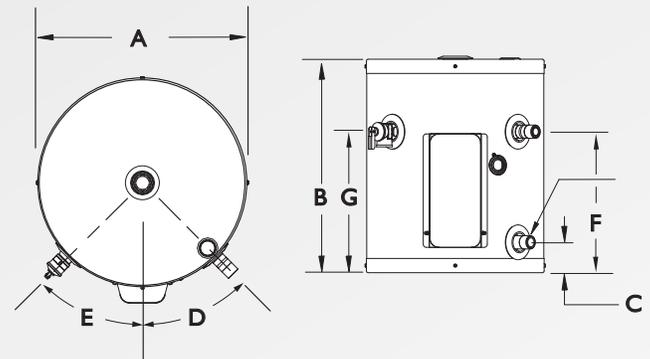

SPECIFICATIONS & DIMENSIONS

Models	Storage capacity			Factory installed wattages						Standby Loss Watts	Diameter (A)		Height (B)		C	D	E	F		G		Estimated ship. weight		
				120V		208V		240V			inches	(cm)	inches	(cm)				inches	(cm)	inches	(cm)			inches
	U.S. (gal.)	Litre	Imp. (gal.)	Watts	Amp.	Watts	Amp.	Watts	Amp.															
103ETE	2.5	10	2	1,500	12.50	—	—	—	—	—	10	(25)	13 3/4	(35)	2	(5)	68.4°	—	15 5/8	(40)	16 1/2	(42)	22	(10)
106SEO	6	23	5	1,500	12.50	2,250	10.8	3,000	12.50	—	14	(36)	16 7/8	(43)	2 5/8	(7)	45°	45°	11 3/8	(29)	10 1/8	(26)	35	(14)
112SEO	12	45	10	1,500	12.50	2,250	10.8	3,000	12.50	—	16	(41)	22 3/8	(57)	2 5/8	(7)	45°	45°	16 5/8	(42)	15 1/4	(39)	52	(24)
119SEO	19	72	16	1,500	12.50	2,250	10.8	3,000	12.50	54	18 1/4	(46)	26 1/2	(67)	2 5/8	(7)	45°	45°	20 5/8	(52)	19 3/8	(49)	65	(30)
130E†	26	100	22	1,500	12.50	2,250	10.8	3,000	12.50	56	18 1/4	(46)	42 1/2	(108)	2 1/4	(6)	58°	—	43 3/4	(111)	—	—	90	(41)

†Model not illustrated, insulated with GREENFOAM.

WARRANTY

6 years | **1 year**

against inner tank leakage | on component parts

Giant offers a SIX (6)* year limited warranty against inner tank leakage from the date of installation. ONE (1)* year limited warranty on component parts. For more specific warranty details including exceptions, consult the owner's manual that comes with each water heater.

*When installed by a professional.



A family company since 1945.

40 Lesage Avenue, Montréal-East, Québec, H1B 5H3 CANADA
 Telephone: 514 645-8893 • Toll free: 1 800 363-9354
 General fax: 514 640-0969
 Customer Service fax: 514 645-8413

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

www.giantinc.com