



Enhancing everyday living



ENGINEERING SUBMITTAL DATA SHEET


C191.1 top entry residential electric water heaters

142ETE MODELS

30 imperial gallons / 135 litres
insulated with 2" eco-friendly **GREENFOAM**

These models meet the safety and construction requirements of CSA 22.2 Standard
and meet or exceed RNCAN energy efficiency requirements

Models	Storage Capacity			Input	Voltage	Standby loss	Diameter (A) In. (cm)	Height (B) In. (cm)	C In. (cm)	D	E In. (cm)	Plumbing connections	Est. ship. wt. lb (kg)
	US gal.	Litres	Imp. gal.										
142ETE-1F7M	36	135	30	1,500 W	120 V	51 W	22 (56)	36¼ (92)	2½ (6)	45°	8 (20)	¾" NPT	115 (52)
142ETE-2F7M	36	135	30	3,000 W	208 V	51 W	22 (56)	36¼ (92)	2½ (6)	45°	8 (20)	¾" NPT	115 (52)
142ETE-3F7M	36	135	30	3,000 W	240 V	51 W	22 (56)	36¼ (92)	2½ (6)	45°	8 (20)	¾" NPT	115 (52)

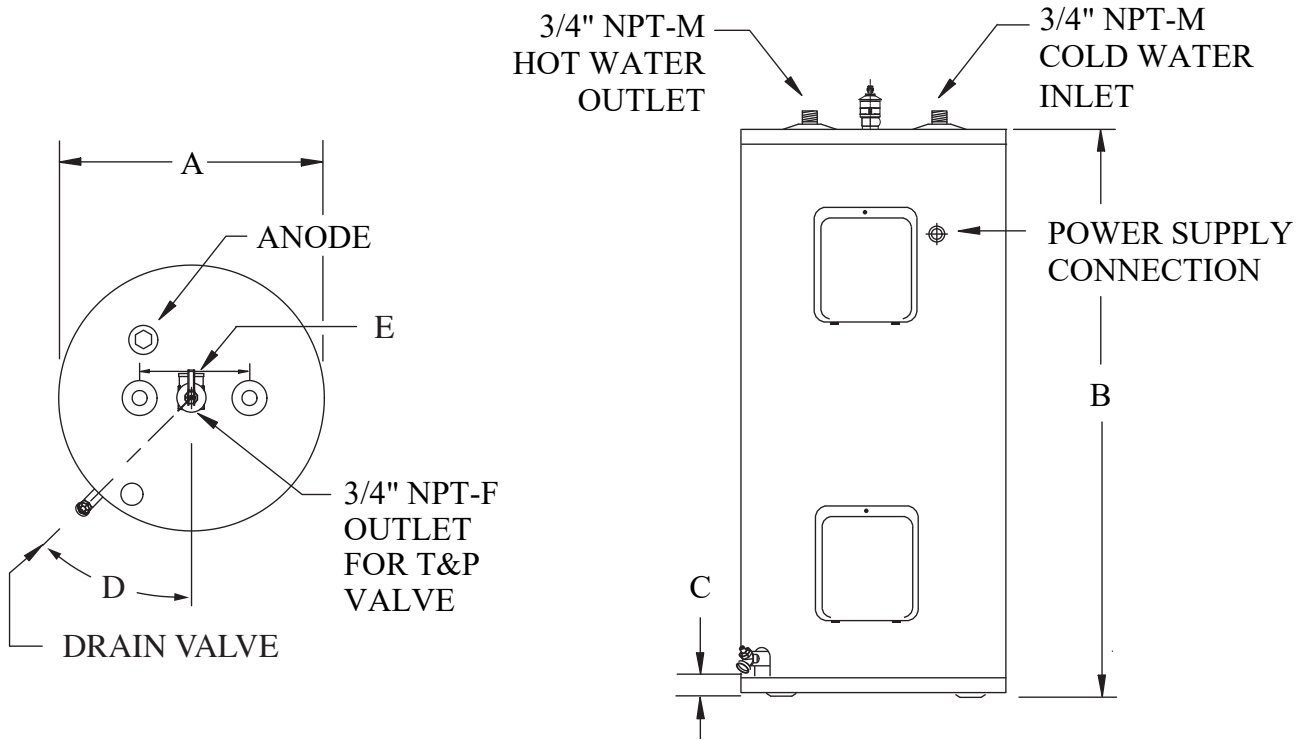

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969