



Enhancing everyday living



ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential power direct vent
natural & propane gas-fired water heaters

UG50 MODELS

42 imperial gallons / 189 litres
insulated with 2" eco-friendly GREENFOAM


These models meet the safety and construction requirements of CSA 4.1 Standard
and meet or exceed NRCan energy efficiency requirements



Models	Storage Capacity			Type of gas	Input BTU	Recovery 90 °F / 50 °C			E.F. Number	Energy Star	Altitude	Est. ship. weight lb (kg)
	U.S. gal	Litres	Imp. gal			U.S. gal	Litres	Imp. gal				
UG50-62LFPDV1-N2U	50	189	42	N	62,000	69.3	262.3	57.7	0.69	✓	N & H	222 (101)
UG50-62LFPDV1-P2U	50	189	42	LP	62,000	69.3	262.3	57.7	0.69	✓	N & H	222 (101)

DIMENSIONS Inches (cm)

Models	A	B	C	D	E	F	G	H	I	J	K	L
All UG50	9 3/8 (24)	43 1/8 (110)	53 1/8 (135)	14 1/2 (37)	54 1/8 (137)	63 1/8 (160)	3 (7.6)	24 (61)	8 (20)	15.6°	90°	17 3/8 (44)

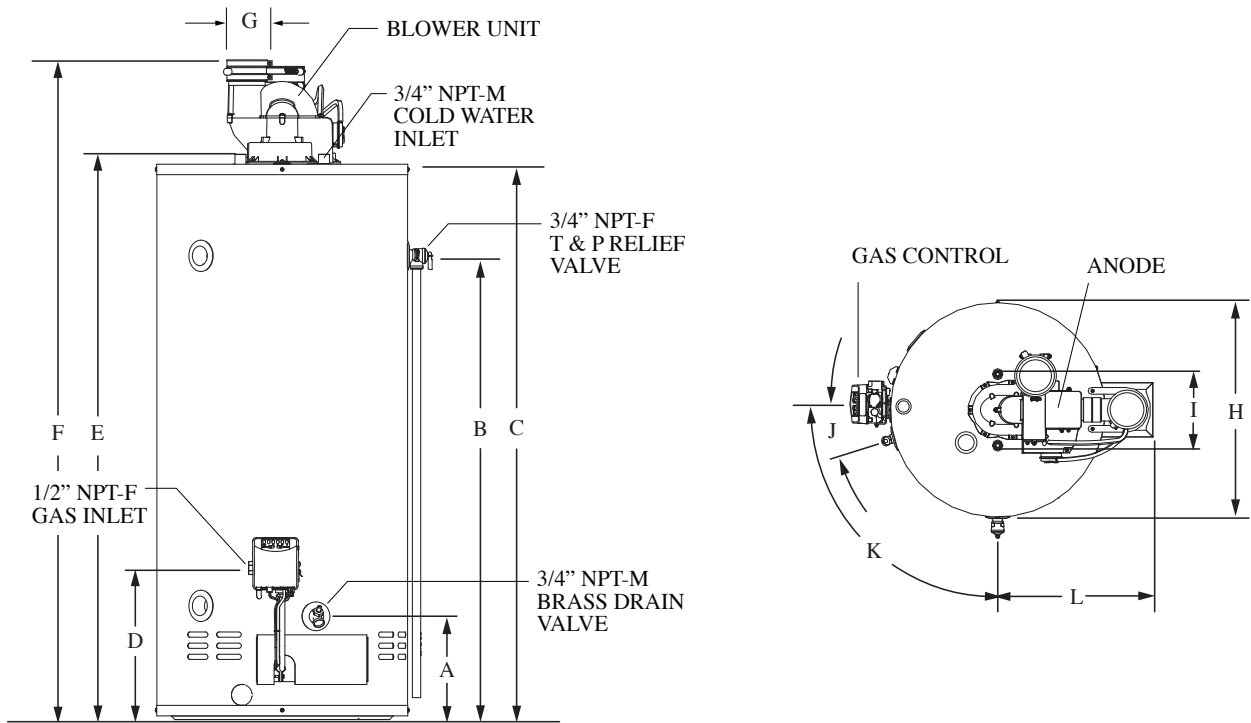

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969