



Enhancing everyday living



ENGINEERING SUBMITTAL DATA SHEET

FFIR compliant residential natural gas-fired water heaters with Flue Damper

UG50 MODELS

42 imperial gallons / 189 litres insulated with 1 1/4" eco-friendly GREENFOAM


These models meet the safety and construction requirements of CSA 4.1 Standard and meet or exceed NRCan energy efficiency requirements



Models	Storage Capacity			Type of gas	Input BTU	Recovery 90 °F / 50 °C			E.F. Number	Energy Star	Altitude	Est. ship. weight lb (kg)
	U.S. gal	Litres	Imp. gal			U.S. gal	Litres	Imp. gal				
UG50-38LFD-N1U	50	189	42	N	38,000	41.5	156.9	34.5	0.68	✓	N & H	158 (72)
UG50-40LFD-N1U	50	189	42	N	40,000	43.6	165.1	36.3	0.68	✓	N	158 (72)

DIMENSIONS Inches (cm)

Models	A	B	C	D	E	F	G	H	I	J	K
All UG50	7 1/2 (18)	40 (102)	48 3/8 (123)	11 (28)	49 7/8 (127)	54 7/8 (139)	8 (20)	22 1/2 (57)	3 (8)	15.6°	90.0°

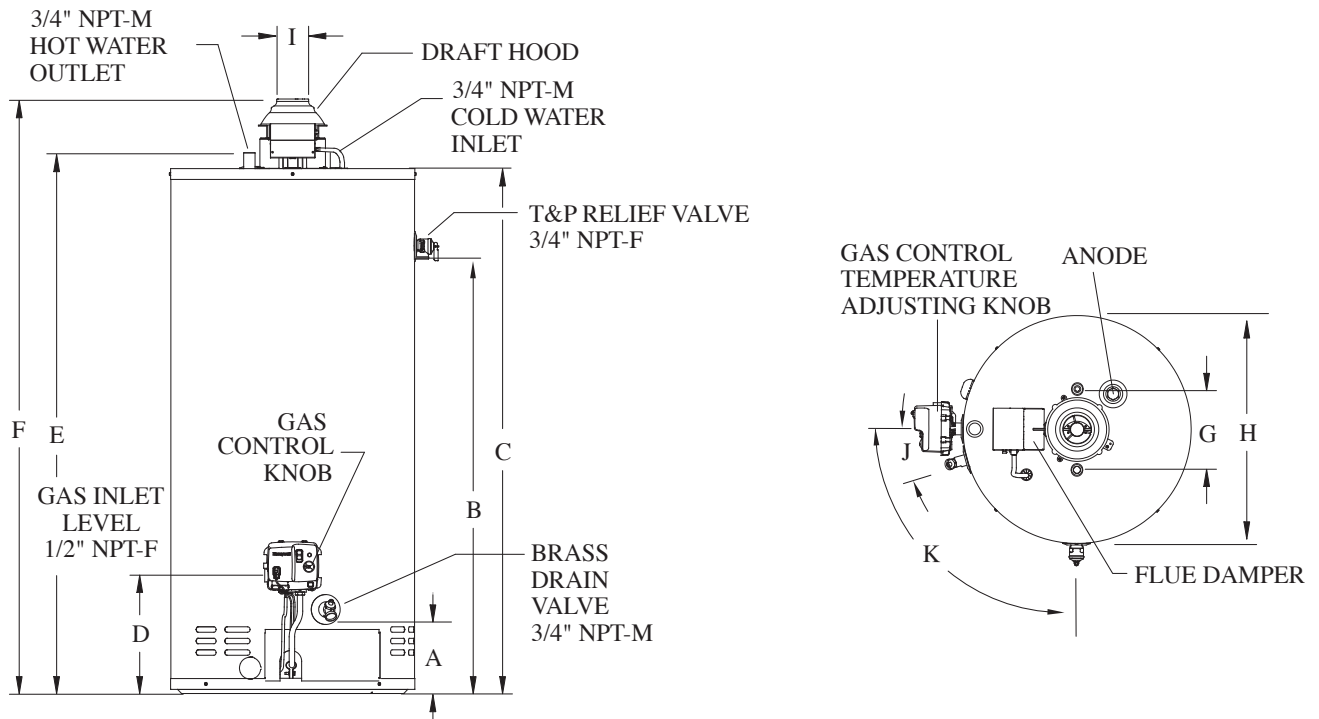

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____	SIZE _____	QUANTITY _____
MODEL NO. _____	SIZE _____	QUANTITY _____
MODEL NO. _____	SIZE _____	QUANTITY _____
MODEL NO. _____	SIZE _____	QUANTITY _____

REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969