



Enhancing everyday living

ENGINEERING SUBMITTAL DATA SHEET

Natural and propane tankless water heaters

UGTC MODELS


All models meet all safety and construction requirements of CSA C191 & C22.2 Standards



Models	Max. Input BTU	Vent Type	Temp. range °F (°C)	Water flow rate (GPM)			Connection		Energy Factor
				75°F Rise Max.	45°F Rise Max.	35°F Rise Max.	Water	Gas	
UGTC-152	152,000	Direct Vent	98 (36.7) to 140 (60.0)	4.0	6.6	8.0	3/4"	3/4"	0.96
UGTC-199	199,000	Direct Vent	98 (36.7) to 140 (60.0)	5.0	8.4	9.8	3/4"	3/4"	0.95

DIMENSIONS inches (cm)

Models	A	B	C	D	E	F	G	H	I	J	K	Est. Ship. Weight lb. (Kg)
All UGTC	29.8 (76)	18.3 (46)	10.1 (26)	20.6 (52)	5.4 (14)	2 (5)	2.9 (7)	2.8 (7)	8.7 (22)	25.7 (65)	28.5 (72)	75 (34)

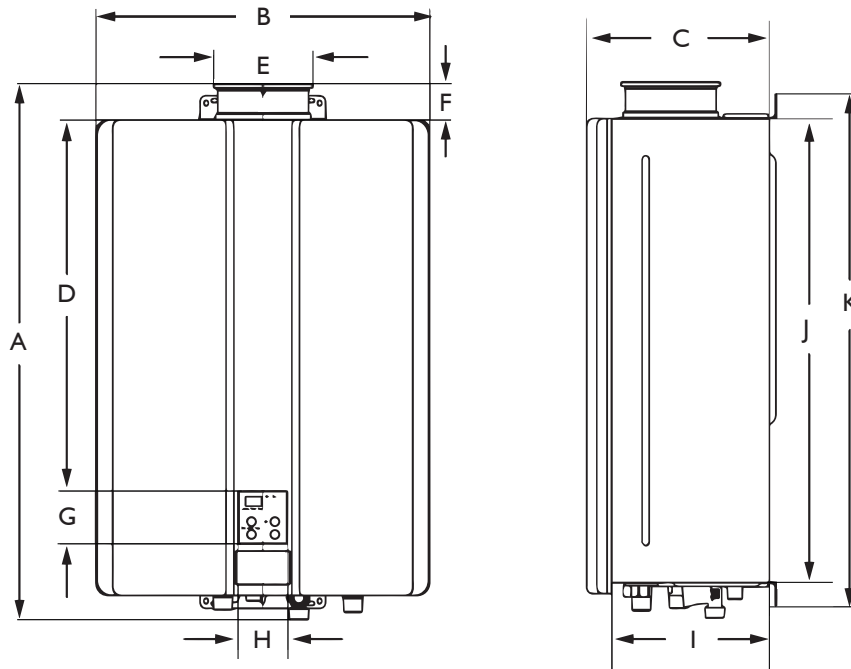

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969